

# JOB 15 - JOB 15/2000 - JOB 15 L - JOB 15/3000

Assembly bench with adjustable bars on work table



**JOB 15**  
**JOB 15 L**



**JOB 15 / 2000**  
**JOB 15 / 3000**


Version	A (mm)	B (mm)	C (mm)	Kg
JOB 15	2004 (min) 2874 (max)	1150	720 (min) 1100 (max)	80
JOB 15/2000	2004 (min) 2874 (max)	1255 (min) 2015 (max)	720 (min) 1100 (max)	125
JOB 15 L	3006 (min) 3875 (max)	1150	720 (min) 1100 (max)	86
JOB 15/3000	3006 (min) 3875 (max)	1255 (min) 2015 (max)	720 (min) 1100 (max)	126

#### Technical specifications:

- Contact surfaces coated with semi-rigid gray scratch-resistant, PVC
- Loading: 180 Kg
- N° 4 lengthwise sliding supporting bars; clamping system through handle
- Pneumatic system with 2 pneumatic connections
- Hardware boxes (n° 6)
- Extensible back support, equipped with 2 longitudinal sliding bars (JOB 15/2000 and JOB 15/3000)
- Carton packing


#### Optionals:

- Lower plan
- Gasket spool kit
- Lateral extension
- Left stop
- Thermoformed bolt and screws carrier
- Small sash
- Additional pneumatic connections kit
- Additional sliding profile support bar (2 m.)
- Additional sliding profile support bars (3 m.)
- Left stop + 3 graduated bars
- Plastic profile (2 m.)
- Cutting hardware direct dimension

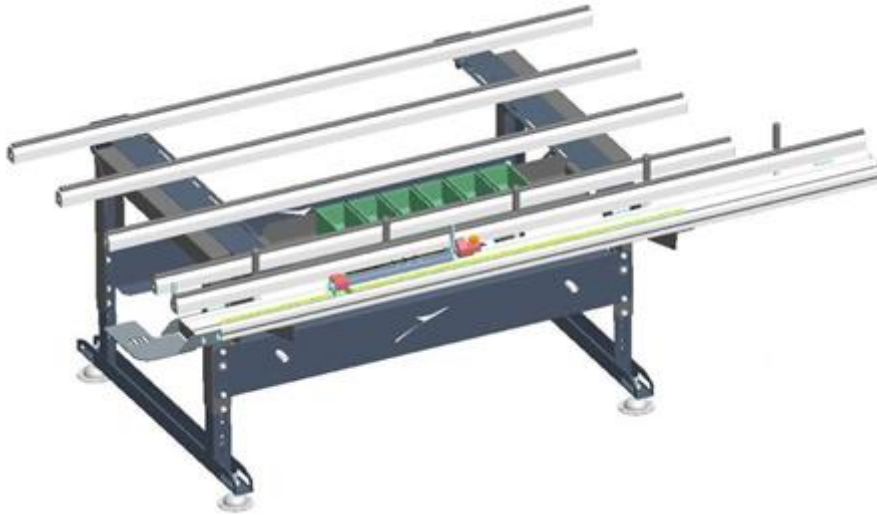

Punching machine optional (\*Represented in the image, ZPX14330 punching machine)

Optional: Packing

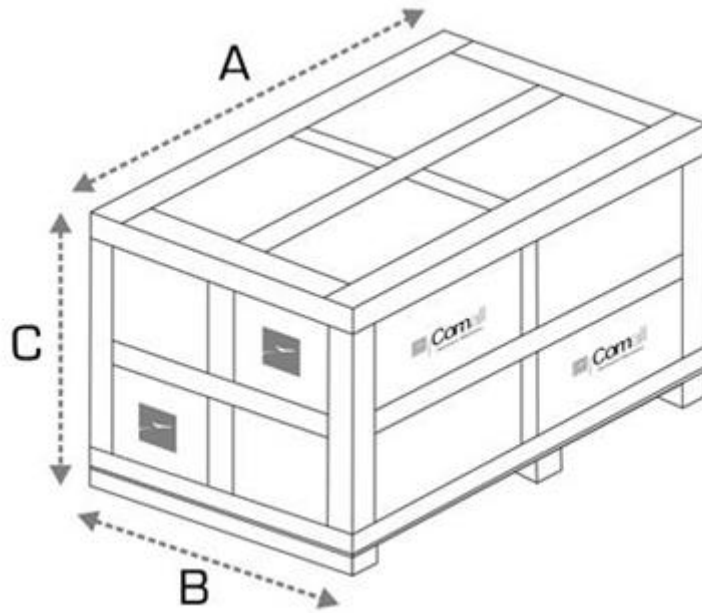

Version	A (mm)	B (mm)	C (mm)	Kg
JOB 15	2050	1000	400	110
JOB 15/2000	2050	1000	400	125
JOB 15 L	3006 (min)	1150	720 (min)	86
	3875 (max)		1100 (max)	
JOB 15/3000	3006 (min)	1255 (min)	720 (min)	126
	3875 (max)	2015 (max)	1100 (max)	