

Job 15 - Job 15/2000 - Job 15 L - Job 15/3000

Assembly bench with adjustable bars on work table



JOB 15
JOB 15 L



JOB 15 / 2000
JOB 15 / 3000



Overall dimensions:

| Version | A (mm) | B (mm) | C (mm) | Kg |
|-------------|--------------------------|--------------------------|-------------------------|-----|
| JOB 15 | 2004 (min) 2874 (max) | 1150 | 720 (min) 1100 (max) | 80 |
| JOB 15/2000 | 2004 (min) 2874 (max) | 1255 (min) 2015 (max) | 720 (min) 1100 (max) | 125 |
| JOB 15 L | 3006 (min) 3875 (max) | 1150 | 720 (min) 1100 (max) | 86 |
| JOB 15/3000 | 3006 (min) 3875 (max) | 1255 (min) 2015 (max) | 720 (min) 1100 (max) | 126 |


Technical specifications:

- Contact surfaces coated with semi-rigid gray scratch-resistant, PVC
- Loading: 180 Kg
- N° 4 lengthwise sliding supporting bars; clamping system through handle
- Pneumatic system with 2 pneumatic connections
- Hardware boxes (n° 6)
- Extensible back support, equipped with 2 longitudinal sliding bars (JOB 15/2000 and JOB 15/3000)
- Carton packing

Optionals:

- Lower plan
- Gasket spool kit
- Lateral extension
- Left stop
- Thermoformed bolt and screws carrier
- Small sash
- Additional pneumatic connections kit
- Additional sliding profile support bar (2 m.)
- Additional sliding profile support bars (3 m.)
- Left stop + 3 graduated bars
- Plastic profile (2 m.)
- Cutting hardware direct dimension




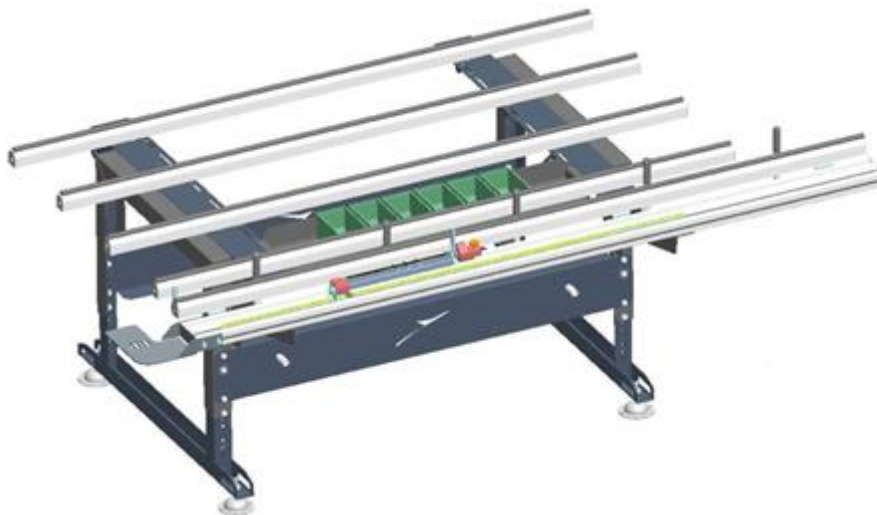

Punching machine optional (*Represented in the image, ZPX14330 punching machine)



Optional: Packing

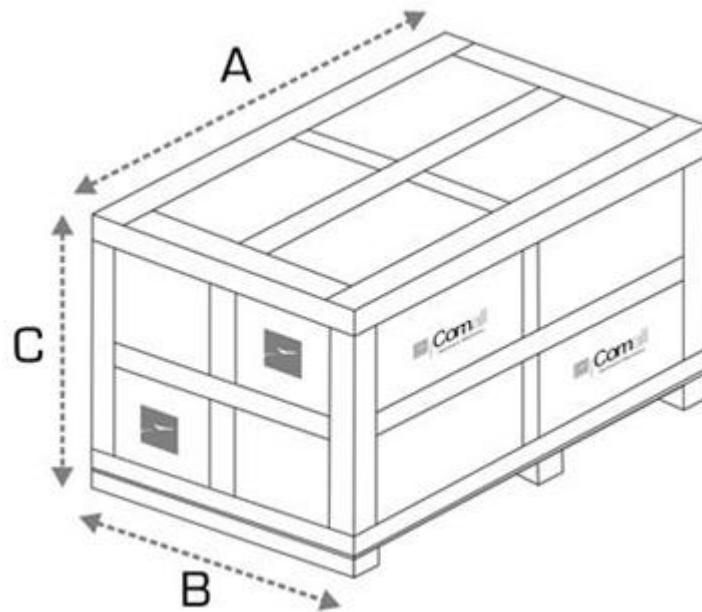

| Version | A (mm) | B (mm) | C (mm) | Kg |
|-------------|--------------------------|--------------------------|-------------------------|-----|
| JOB 15 | 2050 | 1000 | 400 | 110 |
| JOB 15/2000 | 2050 | 1000 | 400 | 125 |
| JOB 15 L | 3006 (min) 3875 (max) | 1150 | 720 (min) 1100 (max) | 86 |
| JOB 15/3000 | 3006 (min) 3875 (max) | 1255 (min) 2015 (max) | 720 (min) 1100 (max) | 126 |

