


Assomak VS

Roller table with digital display and manual length stop positioning



CE

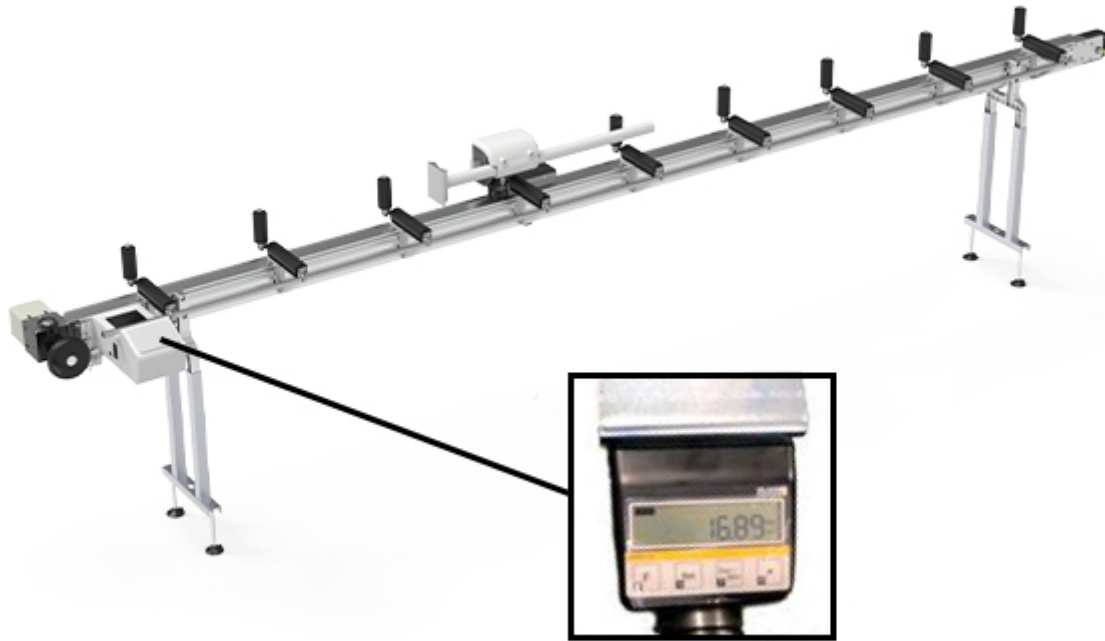

Overall dimensions:

Version	A (mm)	B (mm)	C (mm)	Kg
3 m.	3540	480	1170	58
4,2 m.	4740	543	1000 - 1175	81
6 m.	6540	543	1000 - 1175	118

Technical specifications:

- Minimum cut 0 mm
- Measurement reading by encoder
- Mobile carriage slides along wheels in polymer with belt-driven
- Positioning precision $\pm 0,5$ mm
- Loading capacity per linear meter: 10 Kg
- Width of bar resting surface: 200 mm
- Work table height adjustment range 830-1005 mm
- Patented length stop with sliding surface under the work table, to give constant reference under all working conditions

Standard accessories:

- Pneumatic stop locking
- Belt-driven positioning
- Carton packing


Optionals:

- Additional horizontal + vertical roller
- Belt tensioner + belt 3 m.
- Belt tensioner + belt 4,2 m.
- Belt tensioner + belt 6 m.



Optional: Packing

- Crate packing - 3 m
- Crate packing - 4,2 m.
- Crate packing - 6 m

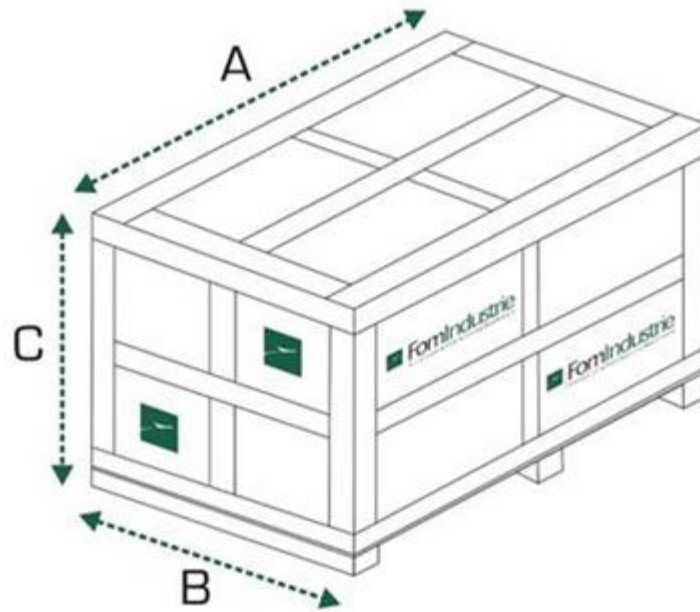

	A (mm)	B (mm)	C (mm)	Kg
3 m.	3720	370	580	75
4.2 m.	4940	370	580	102
6 m.	6720	370	580	176

